

Broan Elite brings you Spire, an exciting new shape in a pro-style hood. It's high efficiency ensures energy savings while you enjoy pro-style performance.

SIZE	STAINLESS	GREASE FILTERS (replacement)	NON-DUCTED FILTERS
30-in.	SPE130SS	HPFA424 (Type "B5")	HPF24 (Type "Xb")
36-in.	SPE136SS	HPFA430 (Type "C5")	HPF30 (Type "Xc")

PERFORMANCE

Duct Orientation	Size	Damper	Sones			CFM		
			Normal	Medium	High	Normal	Medium	High
Vertical - Rectangular	3¼ in. x 10 in.	Included	<0.3	3.0	8.0	120	285	475
Horizontal - Rectangular	3¼ in. x 10 in.	Included	<0.3	3.0	7.5	120	305	505
Vertical - Rectangular	3¼ in. x 14 in.	Included	<0.3	3.0	7.5	140	320	550
Horizontal - Rectangular	3¼ in. x 14 in.	Included	<0.3	3.0	7.5	140	350	600
Round - Vertical	7 in.	Sold Separately	<0.3	3.0	7.5	140	300	490

FEATURES

Control type	3-speed Capacitive Touch
Delay off	no
Filter Clean Reminder	yes
Heat Sentry™	no
ADA Capable	yes
Lighting	2-level ENERGY STAR® LED (included)
Grease Filters	Hybrid Baffle (Qty. 2)
Installation Hardware	EZ1 Brackets
ENERGY STAR®	yes (no if installed non-ducted)
Recirculation	Non-ducted filters sold separately
3¼ in. x 10 in. Damper/ Duct Connector	included

AC INPUT

120V, 60 Hz - 1.9 AMPS

OPTIONAL ACCESSORIES

7-in. Round Damper	BP87Q
ADA Wiring Kit	HAWRK3
Make-up Air Damper	MD6TU, MD8TU or MD10TU

MOUNTING HEIGHT

24 in. to 30 in. from cooktop to bottom of hood



LIMITED WARRANTY

1-year

3-year (LED modules only)

(See installation manual for full warranty text.)

FOR INDOOR USE ONLY

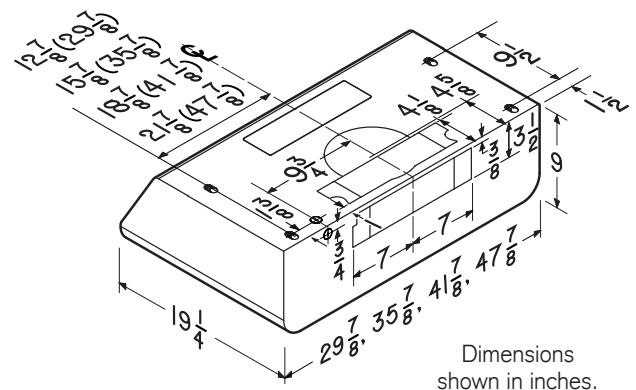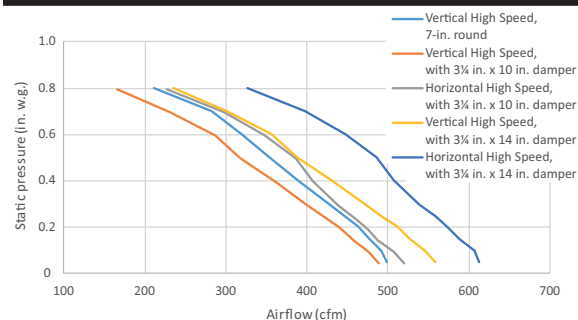

Dimensions
shown in inches.



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

99046189A

Broan-NuTone LLC
Venmar Ventilation ULC

926 West State Street, Hartford, WI 53027
550 Lemire Blvd., Drummondville Québec Canada J2C 7W9

| 1 800-558-1711 | www.broan.com
| 1 877-896-1119 | www.broan.ca

Broan Elite vous propose Spire, une forme remarquablement nouvelle dans une hotte de style professionnel. Son efficacité élevée assure des économies d'énergie tout en profitant de performances professionnelles.

LARGEUR	INOX	FILTRES À GRAISSES (remplacement)	FILTRES DE RECIRCULATION
30 po	SPE130SS	HPFA424 (Type "B5")	HPF24 (Type "Xb")
36 po	SPE136SS	HPFA430 (Type "C5")	HPF30 (Type "Xc")

RENDEMENT								
Orientation du conduit	Largeur	Volet	Sones			pi³/min		
			Normale	Moyenne	Haute	Normale	Moyenne	Haute
Rectangulaire vertical	3¼ po x 10 po	inclus	<0,3	3,0	8,0	120	285	475
Rectangulaire horizontal	3¼ po x 10 po	inclus	<0,3	3,0	7,5	120	305	505
Rectangulaire vertical	3¼ po x 14 po	inclus	<0,3	3,0	7,5	140	320	550
Rectangulaire horizontal	3¼ po x 14 po	inclus	<0,3	3,0	7,5	140	350	600
Rond vertical	7 po	vendu séparément	<0,3	3,0	7,5	140	300	490

CARACTÉRISTIQUES	
Type de commande	Capacitive, à 3 vitesses
Arrêt différé	non
Rappel d'entretien des filtres	oui
Détecteur Heat Sentry ^{MC}	non
Capacité ADA	oui
Éclairage	DEL ENERGY STAR® à 2 intensités (inclus)
Filtres à graisses	Hybrides / à déflecteur (qté 2)
Matériel pour l'installation	Supports EZ1
ENERGY STAR®	oui (non si installées sans conduits)
Recirculation	Filtres de recirculation vendus séparément
Clapet/raccord de conduit 3¼ po x 10 po	inclus
ALIMENTATION CA	
120 V, 60 Hz - 1,9 A	
ACCESSOIRES OPTIONNELS	
Volet rond de 7 po	BP87Q
Ensemble de câblage ADA	HAWRK3
Dispositif d'apport d'air à raccordement direct	MD6TU, MD8TU ou MD10TU
HAUTEUR DE MONTAGE	
De 24 po à 30 po au-dessus de la surface de cuisson	
GARANTIE LIMITÉE	
1 an, 3 ans (modules DEL seulement) (Voir le manuel d'installation pour le texte complet de la garantie.)	
POUR UTILISATION À L'INTÉRIEUR SEULEMENT	

