

vänEE G3000E ECM

Part no. G3000EE

50 to 244 CFM (0.4 in. w.g.)



VB0233

THE PEAK OF FRESH AIR IS HERE

vänEE introduces its Gold Series which surpasses industry standards by bringing together the best performance and the best energy efficiency. Its high airflow, high energy recovery, low power consumption and superior filtration make it one of the most efficient and sophisticated platforms.

The **G3000E ECM** is the perfect solution for mid to large size homes in need for the most energy-efficient ventilation solution. It is also possible to use it in some light commercial applications due to its high fresh air supply.

- Up to 244 CFM at 0.4 in. w.g.
- High efficiency energy recovery core with a sensible recovery efficiency of 75% at 0°C (32°F) and 65% at -25°C (-13°F)
- ECM* motors
- Minimal power consumption of 18W and 3.6 CFM/Watt at 64 CFM
- Merv 6 grade filters and optional HEPA filtration
- Electronic balancing and no balancing dampers
- Included wall mounting bracket

*Electronically Commutated Motor.

REPAIRS AND MAINTENANCE

The G3000E ECM high output ECM motors are permanently lubricated. The electronic circuit board eliminates electromechanical parts, reducing repair time to a minimum.

WARRANTY

The G3000E ECM is protected by a 5-year warranty on parts only, except for the energy recovery core, which is covered by a 10-year warranty, with the original proof of purchase.

Available at:

**These products earned the ENERGY STAR® by meeting strict energy efficiency guidelines set by Natural Resources Canada and the US EPA. They meet ENERGY STAR requirements only when used in Canada.

ENERGY RECOVERY VENTILATOR

Controls

The exclusive Gold-Touch wall control is the only compatible wall control with the new Gold Series. At installation, balance the unit with the help of the Gold-Touch main control to perform electronic balancing, without balancing dampers!


For more details about the control, refer to the User Guide - Main and auxiliary wall controls available at www.vanee.ca.

Options

HEPA Filter 21996

Additional 0.3 in. w.g. static pressure at highest speed to be considered. Refer to the HEPA filter instructions for more details.

Defrosting System

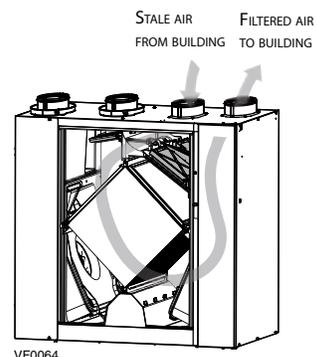

With the help of the Gold-Touch wall control, this unit allows 3 defrost modes for recirculation:

- Standard (factory set regular mode)
- Plus (extended defrost for colder areas)
- Discretion (keeps the same speed when performing defrost as performing ventilation)


OUTDOORS TEMPERATURE*		DEFROST IN MINUTES / AIR EXCHANGE IN MINUTES					
		STANDARD		DISCRETION		PLUS	
°C	°F	CONTINUOUS MODE	TURBO FUNCTION	CONTINUOUS MODE	TURBO FUNCTION	CONTINUOUS MODE	TURBO FUNCTION
-27 and less	-17 and less	10/25	10/20	18/25	18/20	15/20	15/15
-20 to -27	-4 to -17	8/28	8/23	16/28	16/23	12/20	12/15
-15 to -20	5 to -4	8/35	8/30	16/35	16/30	10/25	10/20
-10 to -15	14 to 5	8/45	8/40	16/45	16/40	10/30	10/25
WARMER THAN -10	WARMER THAN 14	NO DEFROST					

*Outdoor temperature is read by a thermistor located inside the unit, next to fresh air from outside port.

Requirements and standards

- Complies with the CSA C22.2 no. 113 Standard applicable to ventilators
- Complies with CSA F326 requirements regulating the installation of Energy Recovery Ventilators
- Technical data was obtained from published results of tests relating to CSA C439 Standards
- HVI certified and ENERGY STAR® qualified**

DIMENSIONS: G3000E ECM

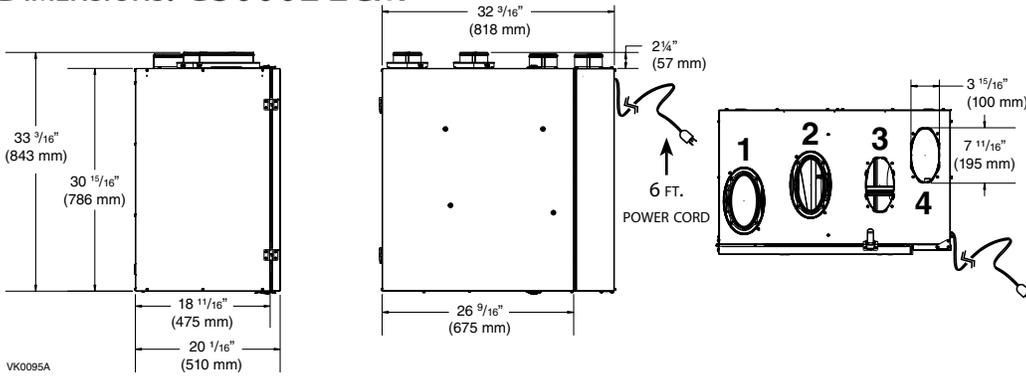


NOTE: ALL UNITS PORTS WERE CREATED TO BE CONNECTED TO DUCTS HAVING A MINIMUM OF 6" DIAMETER, BUT IF NEEDED, THEY CAN BE CONNECTED TO BIGGER SIZED DUCTS BY USING AN APPROPRIATE TRANSITION (E.G.: 6" DIAMETER TO 7" DIAMETER TRANSITION).

- 1: EXHAUST AIR TO OUTSIDE PORT
- 2: FRESH AIR FROM OUTSIDE PORT
- 3: EXHAUST AIR FROM BUILDING PORT
- 4: FRESH AIR TO BUILDING PORT

VENTILATION PERFORMANCE

EXTERNAL STATIC PRESSURE		NET SUPPLY AIR FLOW			GROSS AIR FLOW					
					SUPPLY			EXHAUST		
PA	IN. W.G.	L/S	CFM	M ³ /H	L/S	CFM	M ³ /H	L/S	CFM	M ³ /H
25	0.1	125	265	448	126	267	455	128	271	459
50	0.2	122	259	440	124	263	447	125	265	448
75	0.3	119	252	428	121	256	433	121	256	433
100	0.4	115	244	413	116	246	418	116	246	418
125	0.5	109	231	392	111	235	399	111	235	399
150	0.6	104	220	374	105	222	379	105	222	379
175	0.7	98	208	352	99	210	357	100	212	358
200	0.8	92	195	331	93	197	336	94	199	338
225	0.9	87	184	311	88	186	316	88	186	318
250	1.0	82	174	294	82	174	297	83	176	299
275	1.1	77	163	277	78	165	282	78	165	282

FAN CURVES ACCORDING TO SPEED

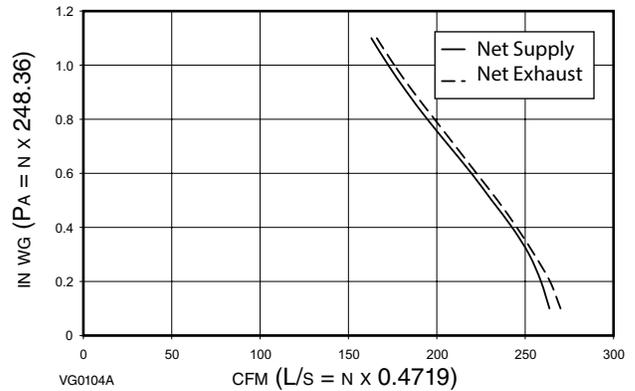

FULLY ADJUSTABLE SPEED RANGE FROM 50 CFM TO MAXIMUM SPEED.

ENERGY PERFORMANCE

SUPPLY TEMPERATURE		NET AIR FLOW			POWER CONSUMED WATTS	SENSIBLE RECOVERY EFFICIENCY	ADJUSTED SENSIBLE RECOVERY EFFICIENCY	APPARENT SENSIBLE EFFECTIVENESS*	LATENT RECOVERY/MOISTURE TRANSFER
°C	°F	L/S	CFM	M ³ /H					
HEATING									
0	32	30	64	109	18	75	76	78	0.61
0	32	55	117	199	33	71	72	74	0.52
0	32	80	170	289	77	67	70	71	0.46
-25	-13	30	64	109	31	65	66	80	0.65
					TOTAL RECOVERY EFFICIENCY		ADJUSTED TOTAL RECOVERY EFFICIENCY		
35	95	30	64	107	18	61		62	
35	95	70	148	253	63	47		48	

*Data not certified by HVI.

NOTE: All specifications are subject to change without notice.

SPECIFICATIONS

- Model: G3000E ECM
- Part Number: G3000EE
- Total Assembled Weight (including polymerized paper core): 96 lb. (44 kg)
- Oval shaped ports; fit 6" round ducts
- Drains: Optional
- Core Filters: 2 washable Merv 6 filters
- Housing: Pre-painted steel
- Optional HEPA Filter
- Insulation: Expanded polystyrene
- Mounting: Suspension by chains and springs or wall bracket system
- Supply and Exhaust Blower Motors:
 - Two ECM motors
 - Protection type: Thermally protected
- Gold-Touch wall control offering 5 manual modes: Recirculation, 20 MIN/H, Continuous, Smart and Turbo
- Energy Recovery Core:
 - Dimensions: 12" x 12" x 16.6" (30.5 cm x 30.5 cm x 42.2 cm)
 - Exchange surface: 168 ft.² (15.6 m²)
 - Weight: 14 lb. (6.4 kg)
 - Type: Cross flow
 - Material: Polymerized paper
 - Warranty: 10 years
- Unit Electrical Characteristics:

Volts	Frequency	Amps	Watts
120	60 Hz	2.2	135

Project:	REMARKS
Location:	
Part no.: G3000EE	
Qty.:	
Submitted by:	Date:



Venmar Ventilation ULC, 550 Lemire Blvd., Drummondville, Québec, Canada J2C 7W9 vanee.ca 800 567-3855



G3000EECMd2210