


MODELS RMDD3004EX, RMDD3604EX, RMDD4804EX DOWNDRAFT

For use with external blowers.



Exhaust your cooktop without the use of an over-head hood. Control a powerful external blower from the cooktop location. Compact design is installed directly behind cooktop.

FEATURES

HOUSING:

- Rugged steel construction
- Silver paint and/or galvanized finish
- Space-saving - can be used with most cooktops on the market
- 30", 36", or 48" widths - Fits standard-size cabinets
- For indoor use only

CHIMNEY ASSEMBLY:

- Brushed stainless steel cover - just press button to turn unit "ON"
- Chimney rises 9½" when activated - ideal for large pots and pans
- Stylish, stainless steel filters with aluminum mesh - easy to remove and dishwasher-safe
- Stainless steel chimney front and back - makes cleanup quick and easy
- Flush-mounted, infinite rotary speed blower control
- Heat Sentry™ adjusts speed of blower to HIGH in case of excess heat
- Conveniently located button - press to lower air vent and turn unit "OFF"
- OPTIONAL Remote Control (Model RMDDRBK) activates downdraft from alternate location

DUCT CONNECTOR HOUSING:

- Rugged steel construction with galvanized finish
- 3¼" x 14" rectangular duct connector (8" round duct using Model 459 transition)
- 3-position discharge - movable to adjust to floor joists

TYPICAL SPECIFICATION

Downdraft blower system shall be Broan Elite Model RMD-D3004EX (RMDD3604EX) (RMDD4804EX).

Unit shall be for indoor use only.

Unit to have steel housing with silver paint or galvanized finish. Air vent to rise at least 9½" and have a stainless steel front and back for ease of cleaning.

Filters to be stainless steel with aluminum mesh, easy to remove and dishwasher-safe.

3¼" x 14" duct connector shall be adjustable to accommodate ductwork from left, right, or below and have 7½" side to side adjustment.

Unit must accept an optional remote control activation button.

Unit to include Heat Sentry™, to adjust blower speed to HIGH in case of excess heat.

Downdraft system shall operate on 120 VAC and be able to be plugged into a standard grounded outlet. It will have an infinite speed blower control.

SPECIFICATIONS

VOLTS	HZ	AMPS	DUCT
120	60	6	3¼" x 14"




Broan-NuTone LLC Hartford, Wisconsin www.broan.com 800-558-1711
Broan-NuTone Canada, Inc. Mississauga, Ontario www.broan.ca 877-896-1119

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date


INSTALLATION PLANNING • MODELS RMDD3004EX, RMDD3604EX, RMDD4804EX

DIMENSIONS

NOTE: Dimensions shown are for reference only. Before cutting out countertop, refer to instructions packed with downdraft and cooktop.

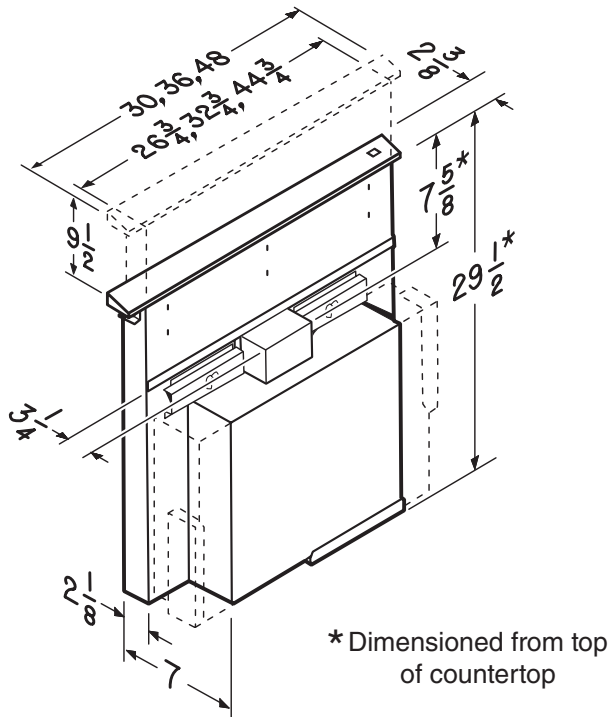


TYPICAL INSTALLATION

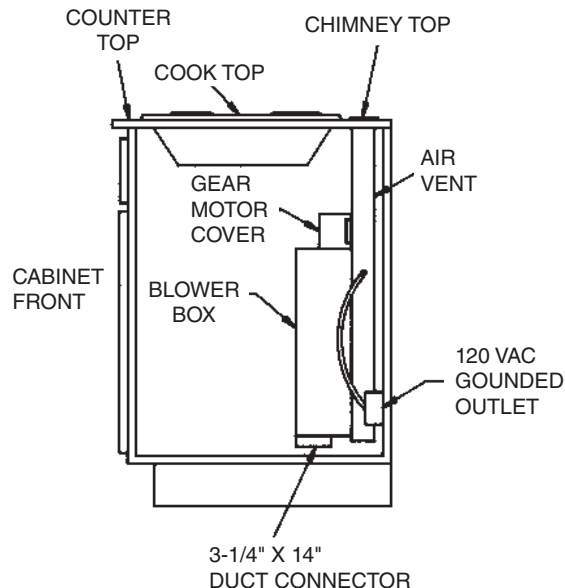

ELECTRICAL

The unit has an 18-in. power cord with a 3-pronged plug. Plan to provide a grounded outlet within reach of this cord.

DOWNDRAFT

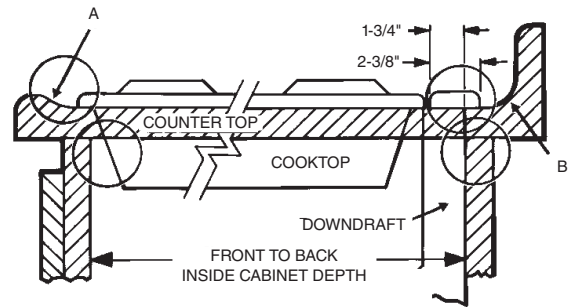


Refer to the cooktop installation instructions for dimensions of cooktop, countertop cut-out, and cabinet requirements. The RMDD3004EX can be installed in most standard 30" wide cabinets, (RMDD3604EX can be installed in most standard 36" wide cabinets), (RMDD4804EX can be installed in most standard 48" wide cabinets).



Cooktop depth can vary greatly from one to another. This may cause the fit of these two appliances to be rather tight.

Pay special attention to the 4 areas of potential interference highlighted above. A countertop with (A) a raised lip and/or (B) a backsplash, may not allow enough flat countertop for a proper installation. The back of the downdraft cut-out will be 1 3/4" from the cooktop and 2" of FLAT countertop is needed behind cooktop.

DUCTWORK

This downdraft blower system is designed for use with 3 1/4" x 14" rectangular ductwork (can be transitioned to 8" or 10" round). The blower discharge can be positioned in one of 3 directions with 7 1/2" movement side to side.

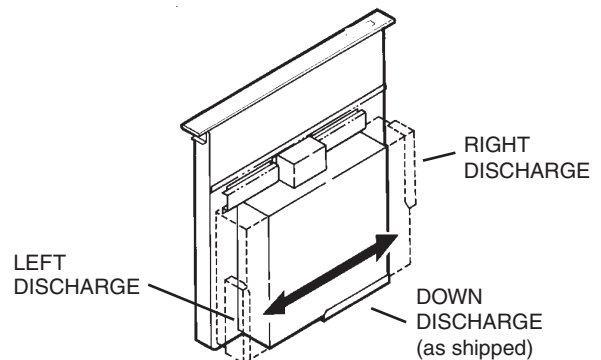

3 1/4" x 14" TO 8" RD. TRANSITION	3 1/4" X 14" 90° ELBOW	8" RD. ELBOW
		
5 FT.	19 FT.	11 FT.

The system will operate most efficiently when the ductwork does not exceed 40 feet of equivalent duct. The chart above, shows equivalent feet of elbows and transitions. The number of feet of straight 3 1/4" x 14" or 8" duct plus the equivalent feet of elbows or transitions to be used should equal 40 feet or less.

The equivalent feet of various roof and wall caps has been taken into consideration. Do not include them in this calculation.