



Venmar AVS X24ERV ECM

Part no. X24ERVE

50 to 210 CFM (0.4 in. w.g.)



VB0232

THE FUTURE OF FRESH AIR

Venmar AVS introduces its X Series which surpasses industry standards by bringing together the best performance and the best energy efficiency. Its high airflow, high energy recovery, low power consumption and superior filtration make it one of the most efficient and sophisticated platforms.

The X24ERV ECM is the perfect solution for mid to large size homes in need for the most energy-efficient ventilation solution. It is also possible to use it in some light commercial applications due to its high fresh air supply.

- Up to 210 CFM at 0.4 in. w.g.
- High efficiency energy recovery core with a sensible recovery efficiency of 83% at 0°C (32°F) and 65% at -25°C (-13°F)
- ECM* motors
- Minimal power consumption of 21 W and 3.0 CFM/Watt at 64 CFM
- Merv 6 grade filters and optional HEPA filtration
- Electronic balancing and no balancing dampers
- Included wall mounting bracket

*Electronically Commutated Motor.

REPAIRS AND MAINTENANCE

The X24ERV ECM high output ECM motors are permanently lubricated. The electronic circuit board eliminates electromechanical parts, reducing repair time to a minimum.

WARRANTY

The X24ERV ECM is protected by a 5-year warranty on parts only, except for the energy recovery core, which is covered by a 10-year warranty, with the original proof of purchase.

Available at:



**These products earned the ENERGY STAR® by meeting strict energy efficiency guidelines set by Natural Resources Canada and the US EPA. They meet ENERGY STAR requirements only when used in Canada.

ENERGY RECOVERY VENTILATOR

Controls

The exclusive X-Touch wall control is the only compatible wall control with the X Series. At installation, balance the unit with the help of the X-Touch main control to perform electronic balancing, without balancing dampers!


For more details about the control, refer to the User Guide - Main and auxiliary wall controls available at www.venmar.ca.

Option

HEPA Filter 22528

Additional 0.3 in. w.g. static pressure at highest speed to be considered. Refer to the HEPA filter instructions for more details.

Defrosting System

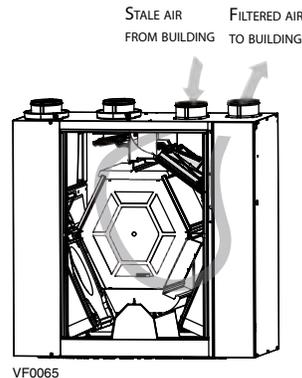

VF0065

With the help of the X-Touch wall control, this unit allows 3 defrost modes for recirculation:

- Standard (factory set regular mode)
- Plus (extended defrost for colder areas)
- Discretion (keeps the same speed when performing defrost as performing ventilation)


OUTDOOR TEMPERATURE*		DEFROST IN MINUTES / AIR EXCHANGE IN MINUTES					
		STANDARD		DISCRETION		PLUS	
°C	°F	CONTINUOUS MODE	TURBO FUNCTION	CONTINUOUS MODE	TURBO FUNCTION	CONTINUOUS MODE	TURBO FUNCTION
-27 and less	-17 and less	10/20	10/15	18/20	18/15	15/15	15/12
-20 to -27	-4 to -17	8/30	8/25	16/30	16/20	12/20	12/15
-15 to -20	5 to -4	8/40	8/30	16/40	16/30	10/25	10/20
-10 to -15	14 to 5	8/50	8/40	16/50	16/40	10/30	10/25
WARMER THAN -10	WARMER THAN 14	NO DEFROST					

*Outdoor temperature is read by a thermistor located inside the unit, next to fresh air from outside port.

Requirements and standards

- Complies with the CSA C22.2 no. 113 Standard applicable to ventilators
- Complies with CSA F326 requirements regulating the installation of Energy Recovery Ventilators
- Technical data was obtained from published results of tests relating to CSA C439 Standards
- HVI certified and ENERGY STAR® qualified**

DIMENSIONS: X24ERV ECM

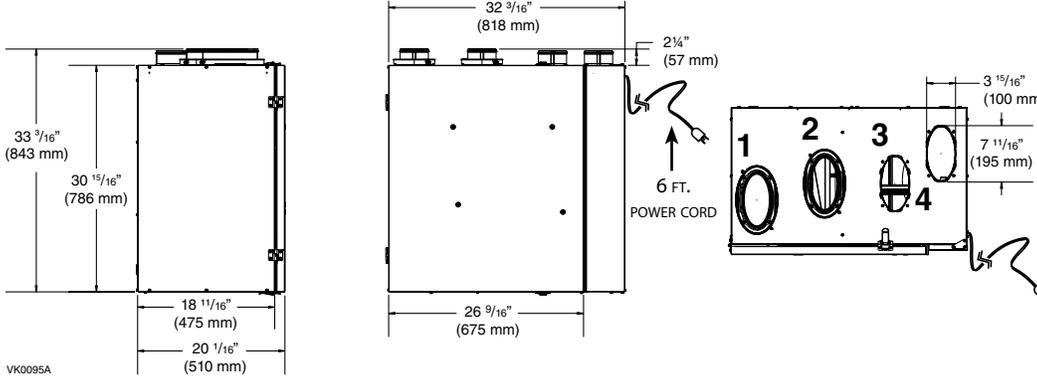


NOTE: ALL UNITS PORTS WERE CREATED TO BE CONNECTED TO DUCTS HAVING A MINIMUM OF 6" DIAMETER, BUT IF NEEDED, THEY CAN BE CONNECTED TO BIGGER SIZED DUCTS BY USING AN APPROPRIATE TRANSITION (E.G.: 6" DIAMETER TO 7" DIAMETER TRANSITION).

- 1: EXHAUST AIR TO OUTDOORS PORT
- 2: FRESH AIR FROM OUTDOORS PORT
- 3: EXHAUST AIR FROM BUILDING PORT
- 4: FRESH AIR TO BUILDING PORT

VENTILATION PERFORMANCE

EXTERNAL STATIC PRESSURE		NET SUPPLY AIR FLOW			GROSS AIR FLOW					
PA	IN. W.G.	NET SUPPLY AIR FLOW			SUPPLY			EXHAUST		
		L/S	CFM	M ³ /H	L/S	CFM	M ³ /H	L/S	CFM	M ³ /H
25	0.1	110	233	396	111	235	401	113	239	406
50	0.2	107	227	384	108	229	389	108	229	391
75	0.3	103	218	372	105	222	377	105	222	377
100	0.4	99	210	357	101	214	364	101	214	362
125	0.5	96	203	345	97	206	350	97	206	348
150	0.6	92	195	330	93	197	335	93	197	335
175	0.7	87	184	314	89	189	319	89	189	319
200	0.8	83	176	301	85	180	304	85	180	304
225	0.9	79	167	285	81	172	290	81	172	290
250	1.0	75	159	270	76	161	275	76	161	273
275	1.1	71	150	257	72	153	260	72	153	258

FAN CURVES ACCORDING TO SPEED

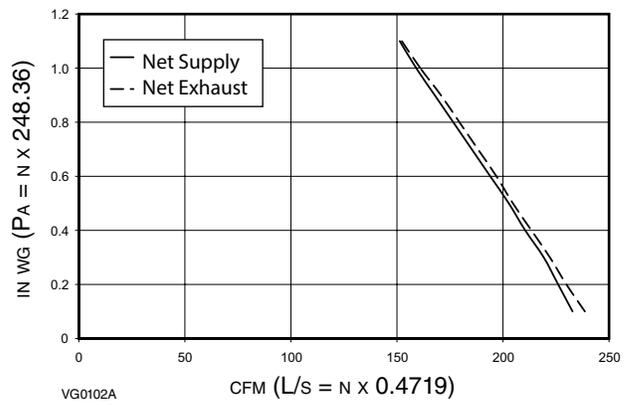

ENERGY PERFORMANCE

SUPPLY TEMPERATURE		NET AIR FLOW			POWER CONSUMED WATTS	SENSIBLE RECOVERY EFFICIENCY	ADJUSTED SENSIBLE RECOVERY EFFICIENCY	APPARENT SENSIBLE EFFECTIVENESS*	LATENT RECOVERY/MOISTURE TRANSFER
°C	°F	L/S	CFM	M ³ /H					
HEATING									
0	32	30	64	109	21	83	85	86	0.68
0	32	55	117	199	43	76	78	80	0.58
0	32	80	170	289	101	70	74	72	0.48
-25	-13	30	64	109	34	65	67	86	0.62
					TOTAL RECOVERY EFFICIENCY		ADJUSTED TOTAL RECOVERY EFFICIENCY		
35	95	30	64	109	21	68		69	
35	95	64	136	231	62	57		58	

FULLY ADJUSTABLE SPEED RANGE FROM 50 CFM TO MAXIMUM SPEED.

*Data not certified by HVI.

NOTE: All specifications are subject to change without notice.

SPECIFICATIONS

- Model: X24ERV ECM
- Part Number: X24ERVE
- Total Assembled Weight (including polymerized paper core): 108 lb. (49 kg)
- Oval shaped ports; fit 6" round ducts
- Drains: Optional
- Core Filters: 2 washable Merv 6 filters
- Housing: Pre-painted steel
- Optional HEPA Filter
- Insulation: Expanded polystyrene
- Mounting: Suspension by chains and springs or wall bracket system
- Supply and Exhaust Blower Motors:
 - Two ECM motors
 - Protection type: Thermally protected
- X-Touch wall control offering 5 manual modes: Recirculation, 20 MIN/H, Continuous Smart and Turbo
- Energy Recovery Core:
 - Dimensions: 14.25" X 14.25" x 16.6" (36.2 cm x 36.2 cm x 42.2 cm)
 - Exchange surface: 136 ft.² (12.6 m²)
 - Weight: 26 lb. (11.8 kg)
 - Type: Counterflow
 - Material: Polymerized paper
 - Warranty: 10 years
- Unit Electrical Characteristics:

Volts	Frequency	Amps	Watts
120	60 Hz	2.2	135

Project:	REMARKS
Location:	
Part no.: X24ERVE	
Qty.:	
Submitted by:	Date:



Venmar Ventilation ULC, 550 Lemire Blvd., Drummondville, Québec, Canada J2C 7W9 venmar.ca 800-567-3855



X24ERVECMd2110